



TESTING PSYCHROMETRIC TEST ROOMS

ENVIRONMENTAL CHAMBERS
FOR AIR CONDITIONERS AND HEAT PUMPS TESTING





ARALAB is a company specialised in designing, developing, manufacturing and servicing of high quality climatic chambers and controlled environment rooms.

Since 1985 we have been perfecting ways to create and control temperature, humidity, light, air flow and many other environmental conditions.

Only the highest quality components are used to manufacture our chambers so customers can enjoy the best equipment for their research and testing purposes.

Control the environment. Your own climate.



PSYCHROMETRIC TEST ROOMS

Designed for the development and performance evaluation of air conditioners and heat pumps. Air conditioners may be in the form of through the wall units, floor standing evaporator split systems and Package Units.

The rooms will be side by side simulating “Indoor” and “Outdoor” conditions with temperature, humidity and air flow independently controlled.

Each chamber can include an Air Enthalpy Measuring device to enable precise measurement of capacity and efficiency of air conditioners and heat pumps in accordance with the air enthalpy method.



Certified ISO:9001 for its Quality Management System







RELATED TESTING STANDARDS

DIN EN 14511	ISO 13253	ASHRAE 41.1
DIN EN 14825	ISO 5151	ASHRAE 41.2
DIN EN 16147	JIS B 8615-1	ASHRAE 41.3
		ASHRAE 41.6







TECHNICAL SPECIFICATIONS AND PERFORMANCES

● ● ● ● INDOOR ROOM*


ARALAB CAN CUSTOMIZE SIZES AND PERFORMANCES OF THE TEST CHAMBERS

TEMPERATURE		+5°C to +45°C
RH RANGE		20% to 90% RH
TEMPERATURE PRECISION		<± 0,5°C
TEMPERATURE UNIFORMITY		<± 2,0°c
HUMIDITY PRECISION		<± 2 % RH
HUMIDITY UNIFORMITY		<± 2 % RH

● ● ● ● OUTDOOR ROOM

TEMPERATURE		-30°C to +60°C
RH RANGE		20% to 90% RH
TEMPERATURE PRECISION		<± 0,5°C
TEMPERATURE UNIFORMITY		<± 2,0°c
HUMIDITY PRECISION		<± 2 % RH
HUMIDITY UNIFORMITY		<± 2 % RH



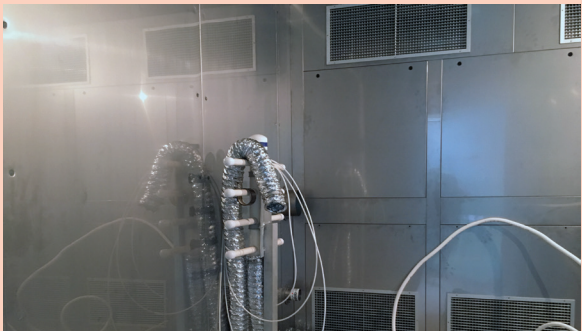


* (Optional Extended Range)




DIMENSIONS AND DRAWINGS

● ● ● ● FITOCLIMA 44.000 EC30



ARALAB CAN CUSTOMIZE SIZES AND PERFORMANCES OF THE TEST CHAMBERS




Interior Dimension (H x W x D)		2.800 x 3.500 x 4.010 mm
Exterior Dimension (H x W x D)		3.010 x 7.920 x 4.210 mm
Double Access Doors (H x W)		1450 x 2.340 mm
Windows (in doors) (H x W)		500 x 400 mm
Interior Light		2 x halogen 500W

PROJECT EXAMPLE FITOCLIMA 42.000 ELP 30

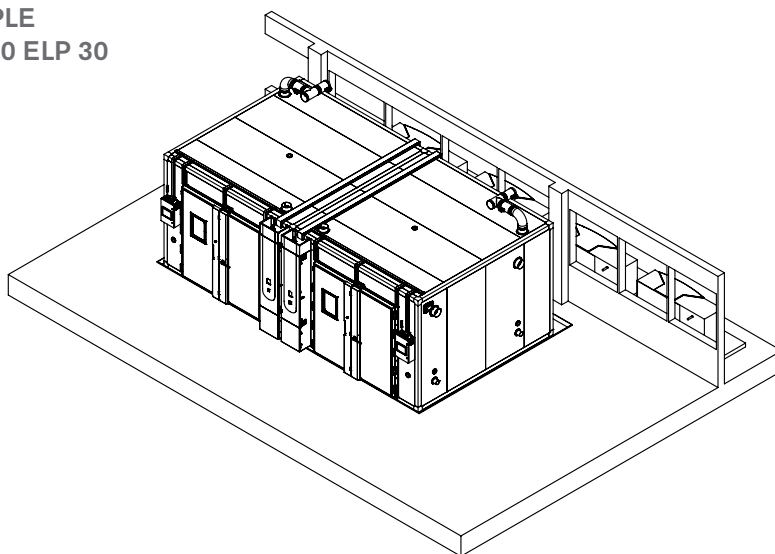

Pressure equalizer Emergency button for door release

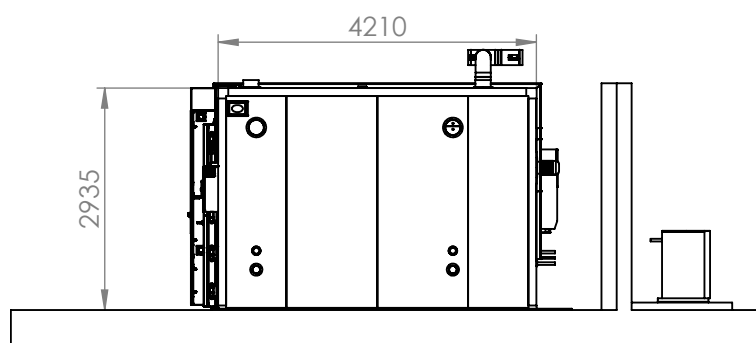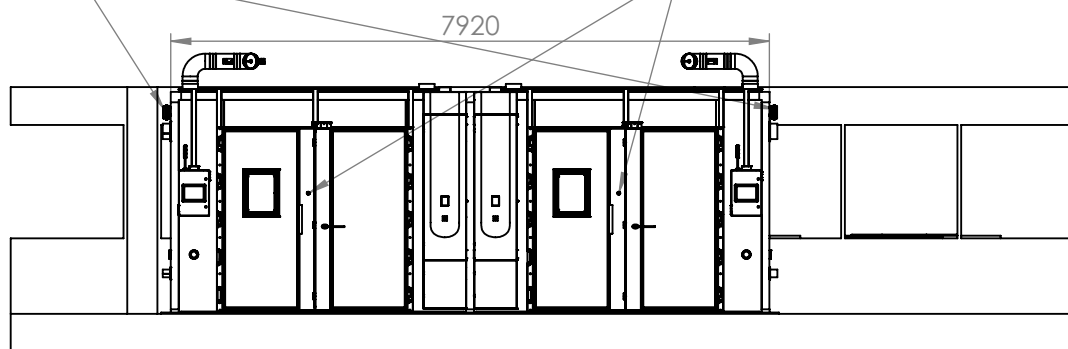

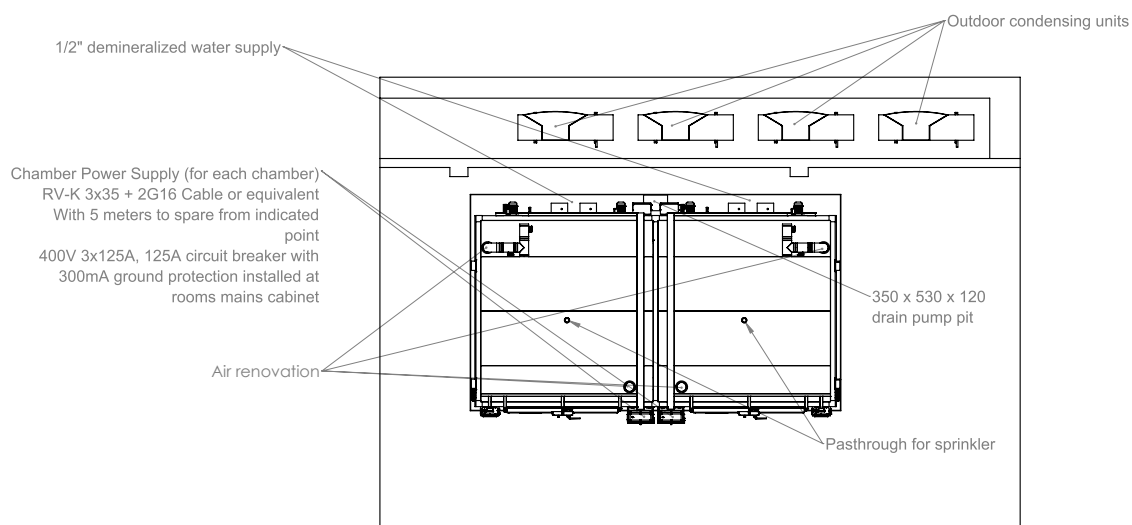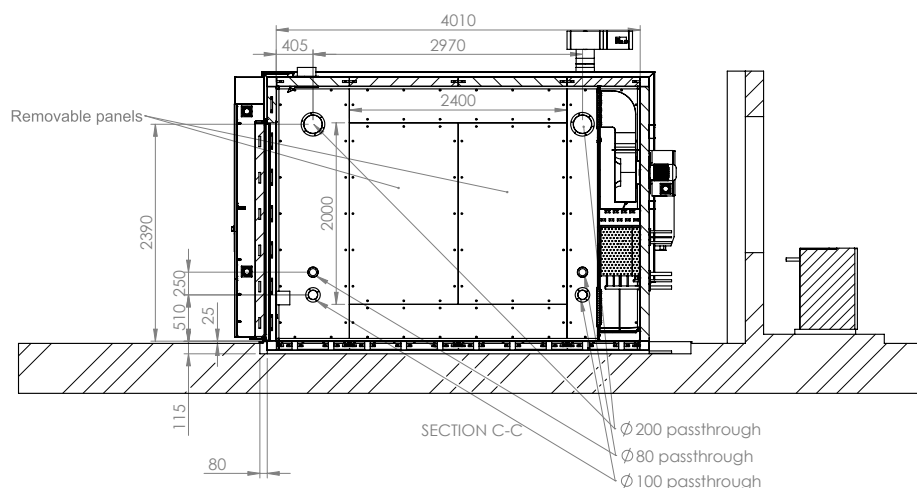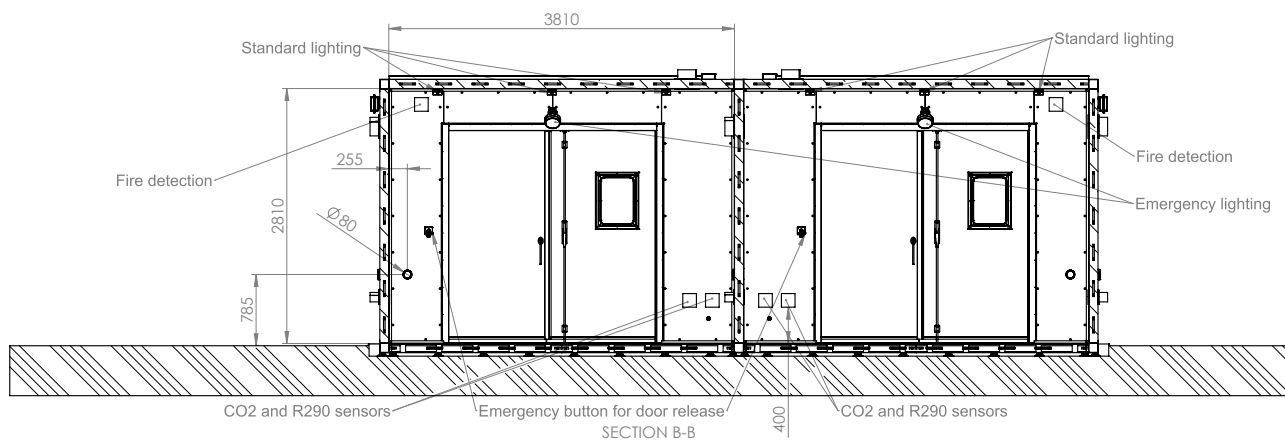

EQUIPMENT DESCRIPTION



CONSTRUCTION

- Sandwich panels EN 14509 Class M1 with injected polyurethane insulation 100mm thick, CFC free
- Interior: AISI 304 stainless steel walls and ceiling
- Floor in AISI 304 stainless steel reinforced to 1000 kg / m2 with sewer point
- Exterior: Steel zinc-plated lacquered finish RAL 7035
- Interior security opening
- Access ramps
- Removable inner partition wall
- Pass-through holes and dimensions according to client specifications



HEATING AND COOLING SYSTEMS

- **Heating** provided by electrical heating elements. The variable heater will be powered through a SCR Power Controller. Available heating power – 30KW.
- **Cooling** by direct expansion. Cooling capacity control will be provided by a true 0-100% modulation. Available cooling power – 30KW.



HUMIDITY SYSTEM


- Humidification with steam generator(s)
- Drying by direct expansion effect



AIR ENTHALPY MEASURING DEVICE

The Air Enthalpy Measuring Device will measure air enthalpy values and determine air flow values and thermal capacities. The tunnels test Room Air **Conditioners Indoor** and **Outdoor Side Cooling** or **Heating Capacity** in a draw-through mode and also fan/blowers air flow capabilities.

The Air Enthalpy Measuring Device provides the sensors needed to automatically obtain the airside enthalpy measurements which are critical to the accuracy of the capacity measurement.

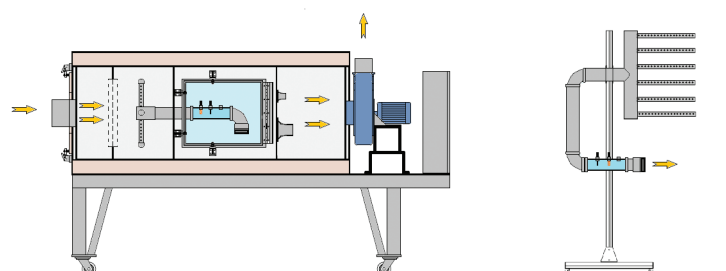

EQUIPMENT DESCRIPTION



CONTROL AND DATA ACQUISITION


Hardware and software for automatic control and acquisition of several raw data to perform tests according the air conditioners and heat pumps standards.

With this system we supply all sensors and measurement equipment necessary to comply the air conditioners and heat pumps standards.



HEAT PUMPS PRECISION THERMAL STABILIZATION WATER CIRCUIT

Water circuit with automatic control to perform the tests according the heat pumps standards.



ATEX SYSTEM

Air renewal system

Activated by the PLC ATEX system.

ATEX Gas detection system

Refrigerant gas detector - R290/R449A/R410A/R134a

CO sensor gas detector

CO2 sensor gas detector

Flame detection

Fire Detection / extinction



TRAINING & SUPPORT

Aralab offers training services to customers new to the hardware, software and testing procedures.

CONTROLLER

CLIMA PLUS

Programmable PLC exclusively developed for ARALAB chambers

Easy to use coloured Touch-Screen Display Interface

Resolution of 0,1°C for Temperature and 0,1% for Relative Humidity

High performance temperature and humidity control with value correction in all ranges

Capability for creating 50 programs of 50 segments each

Internal non volatile memory for storing test data

Automatic restart of tests due to power failure, without losing data and restarting test where it was interrupted

Real-time monitoring of all functions and control of equipment.

Manage control settings via MODBUS/TCP

Possibility of programming a delay of the beginning of test

Monitoring and recording of all alarms

Possibility of performing events by external commands



Several outputs for connecting computers or other devices

Alarms management

Graphic representation of the tests and conditions


Remote access through VNC server

Possibility of running computer test programs and export them to the controller

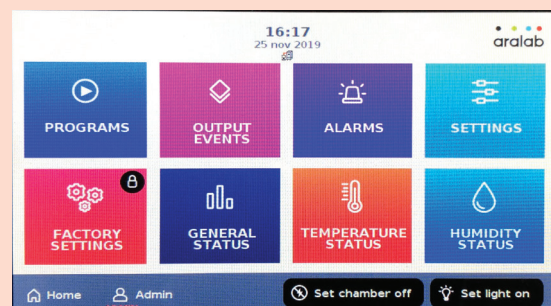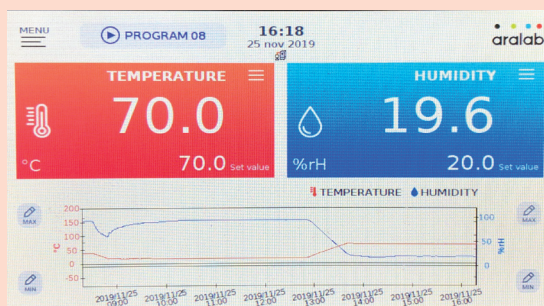


FITOLOG SOFTWARE

The FitoLog software pack is a set of applications designed to facilitate the managing, monitoring and recording of programs and data from the FitoClima chambers. It consists of 3 applications: **FitoLog**, **FitoLogView** and **FitoProgram**.

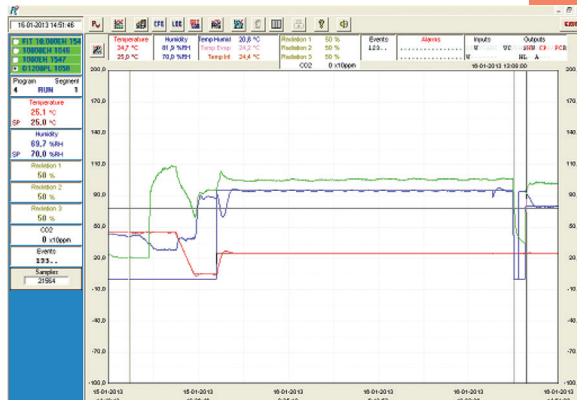


FITOLOG

Records and displays in real time all data and details related to the set-points, running variables and equipment behaviour. It also retrieves information about the active components of the chamber, running processes, errors, alarms and allows the configuration of periodic or alarm triggered remote notifications (by email or SMS, depending on existing connections and accessories).

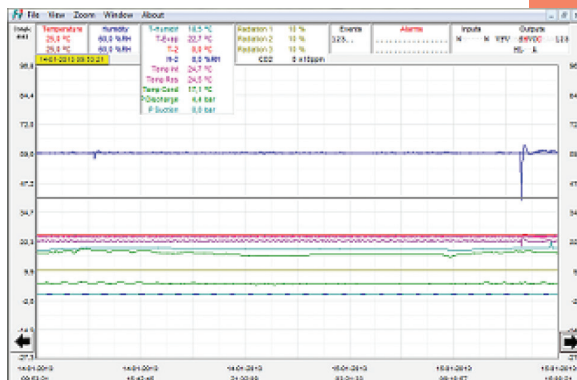

FITOLOGVIEW

It is a working tool to process the data recorded by the FitoLog program. One can view, print and export the log contents to other file types, and analyse the data in other data management software (Excel, Star Office, Access or others).

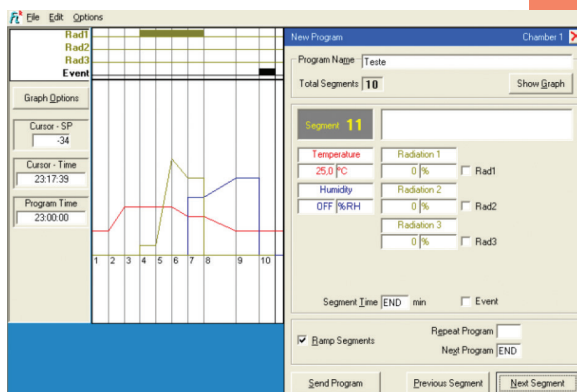

FITOPROGRAM

This application simplifies the creation of programs and its integration on the chamber ClimaPlus controller. Up to 32 programs, each with 24 segments, can be designed and linked to create detailed environmental profiles and simulations.

CONTENT OF THE CHAMBER IS SECURED WITH ALARMS, NOTIFICATIONS, FAST DIAGNOSTICS AND PROMPT TROUBLESHOOTING

With FitoLog it is possible to gather data from each of the chambers systems, which makes it a very useful tool to diagnose any necessary maintenance. This tool works as the "black box" of the equipment, giving Aralab technicians the necessary data to remotely carry out a fast and efficient diagnostic. All that is needed is a FitoLog file.

Let's meet!
aralab@aralab.pt
www.aralab.pt
T: +351 219 154 960



Control the environment
Your own climate

